



GZ10GPM85L-03

10Gbps 850nm 300m SFP+ Transceiver

Features:

- Compliant to SFP+ MSA
- Fully RoHS Compliant
- All metal housing for superior EMI performance
- Compliant mechanics SFF_8432
- Operating data rate 8.5-10.5Gb/s
- 850nm VCSEL Laser
- High sensitivity PIN photodiode and TIA
- LC duplex connector
- Hot pluggable 20pin connector
- Low power consumption < 1.0W
- 0~70°C operating temperature range
- Single +3.3V power supply



Applications

- 10GBASE-SR
- 8.5/10.5 Gb/s Fiber Channel

Standards

- FC-PI-4 Rev 7.00
- 10GFC Rev 4.0
- IEEE 802.3ae 10GBASE-SR
- SFF-8431 Rev 3
- SFF-8472 Rev 10

Shenzhen Guangzhi Communication Technology Co., LTD.

Production Address: 5th floor, Building 2, Peninsula Industrial Park, No. 3, Gangbian Tian Road, East Lake High-tech Zone, Wuhan Hubei Province, China.

Contact: Mr. Yang Tel.: +86-18607555895 E-mail: yanghan@optst.com

Website: www.optst.com

Document Number: OPTST-OP-036 A/0



Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Units
Storage Temperature	T _{stg}	-40	+85	°C
Relative Humidity - Storage	RH _s	0	95	%
Relative Humidity - Operating	RH _o	0	85	%
DC Supply Voltage	V _{CC}	-0.5	3.6	V

Recommended Operating Conditions

Parameter	Symbol	Min	Typ	Max	Units	Notes
Case Operating Temperature	T _{CASE}	0		70	°C	C-Temp
DC Supply Voltage	V _{CC}	3.135	3.3	3.465	V	
Module Supply Current	I _{CC}			300	mA	

Specifications(Tc=25°C, BOL, unless otherwise noted)

Parameter	Symbol	Unit	Min	Typ	Max	Note
Transmitter						
Center Wavelength	λ _C	nm	840	850	860	
Spectral Width(RMS)	Δλ	nm			0.45	300m
Optical Output Power	P _{AV}	dBm	-7		0.5	
Extinction Ratio	ER	dB	3.0			
Average launch power of OFF transmitter	P _{OFF}	dBm			-30	
Receiver						
Center Wavelength	λ _C	nm		850		
Average Receiver Sensitivity 1	P _{AVG}	dBm			-12	
Receiver Reflectance	R _{REFL}	dB			-12	
Assert LOS	LosA	dBm	-30			
De-Assert LOS	LosD	dBm			-16	
LOS Hysteresis		dB	0.5			

Shenzhen Guangzhi Communication Technology Co., LTD.

Production Address: 5th floor, Building 2, Peninsula Industrial Park, No. 3, Gangbian Tian Road, East Lake High-tech Zone, Wuhan Hubei Province, China.

Contact: Mr. Yang Tel.: +86-18607555895 E-mail: yanghan@optst.com

Website: www.optst.com

Document Number: OPTST-OP-036 A/0




Notes

1. Sensitivity for 10.31G PRBS 2³¹-1 and ER=3.5dB and BER better than or equal to 10E-12.

Monitoring Interface

Parameter	Symbol	Spec	Units	Conditions / Notes
Temperature		+/-3°C	°C	
Voltage		+/-5%	V	
IBias		+/-10%	mA	
Rx power		+/-3	dBm	@25°C
Tx power		+/-3	dBm	@25°C

Pin Assignment

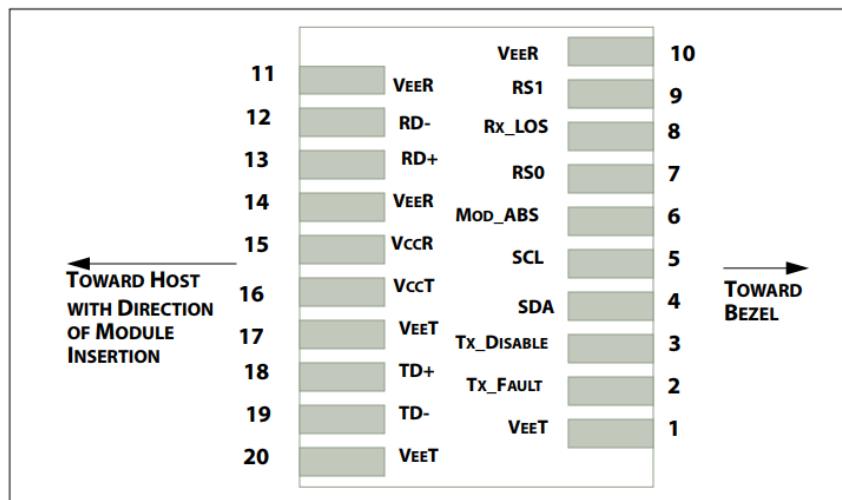

SFP+ pad assignment top view

Shenzhen Guangzhi Communication Technology Co., LTD.

Production Address: 5th floor, Building 2, Peninsula Industrial Park, No. 3, Gangbian Tian Road, East Lake High-tech Zone, Wuhan Hubei Province, China.

Contact: Mr. Yang Tel.: +86-18607555895 E-mail: yanghan@optst.com

Website: www.optst.com



Pin Description

Pin	Name	Function/Description	Notes
1	VEET	Transmitter Ground	1
2	TX_Fault	Transmitter Fault (LVTTTL-O) - High indicates a fault condition	2
3	TX_Disable	Transmitter Disable (LVTTTL-I) – High or open disables the transmitter	3
4	SDA	Two wire serial interface Data Line (LVCMOS-I/O) (MOD-DEF2)	4
5	SCL	Two wire serial interface Clock Line (LVCMOS-I/O) (MOD-DEF1)	4
6	MOD_ABS	Module Absent (Output), connected to VeeT or VeeR in the module	5
7	RS0	Rate Select 0 – Not used, Presents high input impedance	6
8	RX_LOS	Receiver Loss of Signal (LVTTTL-O)	2
9	RS1	Rate Select 1 – Not used, Presents high input impedance	6
10	VEER	Receiver Ground	1
11	VEER	Receiver Ground	
12	RD-	Inverse Received Data out (CML-O), AC Coupled	
13	RD+	Received Data out (CML-O), AC Coupled	
14	VEER	Receiver Ground	
15	VccR	Receiver Power - +3.3V	
16	VccT	Transmitter Power - +3.3 V	
17	VEET	Transmitter Ground	1
18	TD+	Transmitter Data In (CML-I), AC Coupled	
19	TD-	Inverse Transmitter Data In (CML-I), AC Coupled	
20	VEET	Transmitter Ground	1

Notes:

1. The module signal grounds are isolated from the module case.
2. This is an open collector/drain output that on the host board requires a 4.7K Ω to 10K Ω pull-up resistor to VccHost.
3. This input is internally biased high with a 4.7K Ω to 10K Ω pull-up resistor to VccT.
4. Two-Wire Serial interface clock and data lines require an external pull-up resistor dependent on the capacitance load.
5. This is a ground return that on the host board requires a 4.7K Ω to 10K Ω pull-up resistor to VccHost.
6. Rate select can also be set through the 2-wire bus in accordance with SFF-8472 v. 10.2.

Shenzhen Guangzhi Communication Technology Co., LTD.

Production Address: 5th floor, Building 2, Peninsula Industrial Park, No. 3, Gangbian Tian Road, East Lake High-tech Zone, Wuhan Hubei Province, China.

Contact: Mr. Yang Tel.: +86-18607555895 E-mail: yanghan@optst.com

Website: www.optst.com


Document Number: OPTST-OP-036 A/0



Rx Rate Select is set at Bit 3, Byte 110, Address A2h. Tx Rate Select is set at Bit 3, Byte 118, Address A2h.

Writing a "1" selects maximum bandwidth operation. Rate select is the logic OR of the input state of Rate Select Pin and 2-wire bus.

Typical Application Circuit

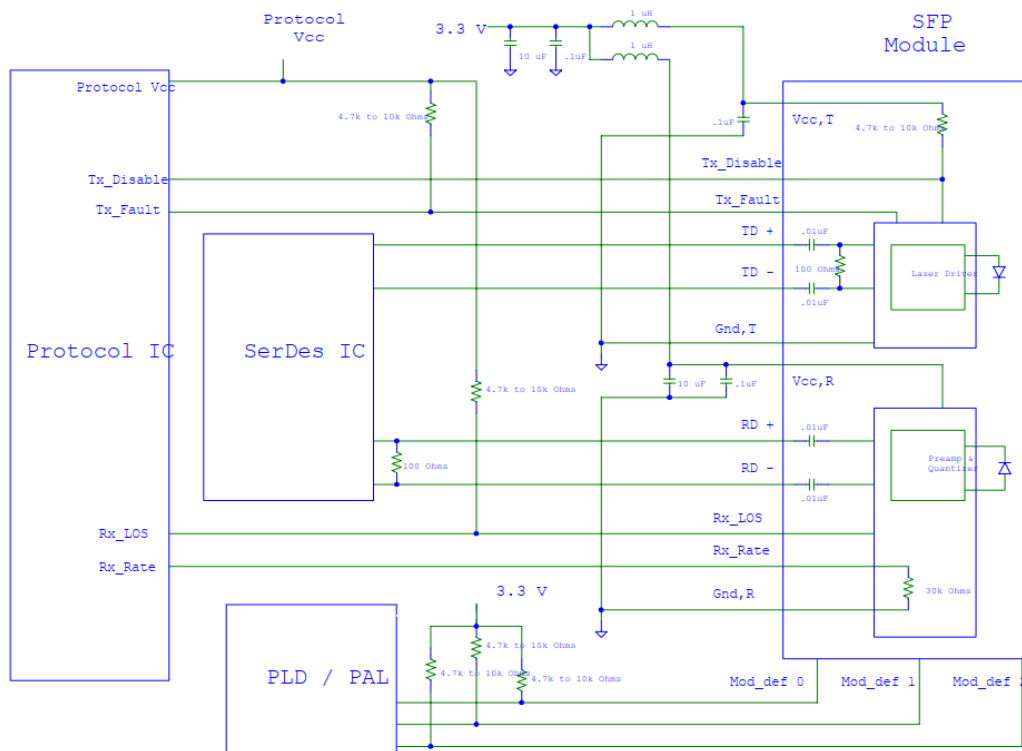

Shenzhen Guangzhi Communication Technology Co., LTD.

Production Address: 5th floor, Building 2, Peninsula Industrial Park, No. 3, Gangbian Tian Road, East Lake High-tech Zone, Wuhan Hubei Province, China.


Contact: Mr. Yang Tel.: +86-18607555895 E-mail: yanghan@optst.com

Website: www.optst.com

Document Number: OPTST-OP-036 A/0



Mechanical Dimensions

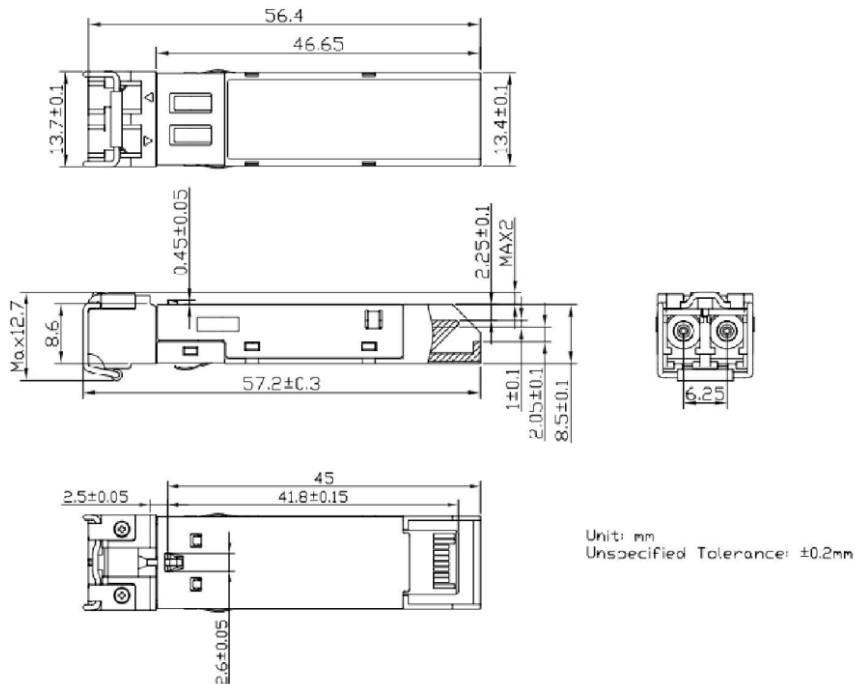

Notes:

1. Tolerance: +/-0.1mm.
2. Others are according with SFF-8074i/SFF-8432 MSA or customer SPEC.
3. Light port according with fiber connector SPEC.

Ordering Information

Part. No	Specifications								
	Rate Gb/s	Tx	Tx WL nm	Po dBm	Rx	Sen. dBm	Temp °C	Reach m	Other
GZ10GPM85L-03	10.3125	VCSEL	850	-7 ~ 0.5	PIN/TIA	<-12	0~70	300	RoHS

Shenzhen Guangzhi Communication Technology Co., LTD.

Production Address: 5th floor, Building 2, Peninsula Industrial Park, No. 3, Gangbian Tian Road, East Lake High-tech Zone, Wuhan Hubei Province, China.

Contact: Mr. Yang Tel.: +86-18607555895 E-mail: yanghan@optst.com

Website: www.optst.com

Document Number: OPTST-OP-036 A/0



Warnings

Handing Precautions:

This device is susceptible to damage as a result of electrostatic discharge (ESD). A static free environment is highly recommended. Please follow guidelines according to proper ESD procedures.

Laser Safety:

Radiation emitted by laser devices can be dangerous to human eyes. Avoid eye exposure to direct or indirect radiation.

Notice:

The information provided on this page contains the product target specifications which are subject to change without notice.

Shenzhen Guangzhi Communication Technology Co., LTD.

Production Address: 5th floor, Building 2, Peninsula Industrial Park, No. 3, Gangbian Tian Road, East Lake High-tech Zone, Wuhan Hubei Province, China.

Contact: Mr. Yang Tel.: +86-18607555895 E-mail: yanghan@optst.com

Website: www.optst.com

Document Number: OPTST-OP-036 A/0