




## GZ40GQPS31L-10X 40G QSFP+ 10km LR4 Transceivers

### FEATURES

- Compliant with 40G Ethernet IEEE 802.3ba 40GBASE LR4 standards
- Uncooled 4x10Gb/s CWDM transmitter
- Supports Infiniband SDR, DDR and QDR
- Operating Temperature
- Commercial: 0°C to +70°C
- Industrial: -40°C to +85°C

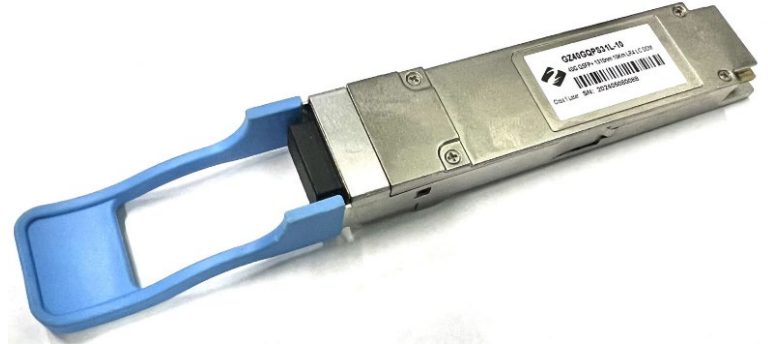

### APPLICATIONS

- Data Center Backbone
- Ethernet Switches
- High-speed Servers
- High-performance Computing Clusters
- SAN, Routers, Hubs, Load Balancer

### ABSOLUTE MAXIMUM RATINGS

Parameter	Conditions	Min.	Max.	Unit
Storage Temperature		-40	+85	°C
Relative Humidity		0	+85	%
Supply Voltage		-0.5	+3.6	V

### RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Case Temperature	T <sub>c</sub>	C-temp	0		70	°C
	T <sub>c</sub>	I-temp	-40		85	°C
Power Supply Voltage	V <sub>CC</sub>		3.135	3.3	3.465	V
Aggregate Bit Rate	BRAVE			41.25		Gbps
Signaling Rate each Channel	BRLANE			10.3125		Gbps
Two Wire Serial (TWS) Interface Clock Rate			---	---	400	kHz
Power Supply Noise			---	---	50	mVpp
Supply Noise Rejection			---	---	100	mV
Receiver Differential Data Output			---	100		Ohm
Operating Distance	D		---	10	---	km

### Shenzhen Guangzhi Communication Technology Co., LTD.

Production Address: 5th floor, Building 2, Peninsula Industrial Park, No. 3, Gangbian Tian Road, East Lake High-tech Zone, Wuhan Hubei Province, China.

Contact: Mr. Yang Tel.: +86-18607555895 E-mail: yanghan@optst.com

Website: [www.optst.com](http://www.optst.com)

Document Number: OPTST-OP-062 A/0



## ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Power Consumption	P				3.5	W
Supply Current	ICC				1050	mA

## TRANSMITTER CHARACTERISTICS

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Aggregate Bit Rate	BRAVE			41.25		Gbps
Signaling rate, each lane (range)	BRLANE			10.3125		Gbps
Center Wavelength	$\lambda_0$		1264	1271	1278	nm
	$\lambda_1$		1284	1291	1298	nm
	$\lambda_2$		1304	1311	1318	nm
	$\lambda_3$		1324	1331	1338	nm
Side-mode suppression ratio	SMSR		30			dB
Total average launch power					8.3	dBm
Average launch power, each lane	Pf		-7		2.3	dBm
Optical Modulation Amplitude (OMA), each lane	TxOMA		-4		3.5	dBm
Difference in launch power between any two lanes (OMA)					6.5	dB
Transmitter and Dispersion Penalty	TDP				2.6	dB
Launch power in OMA minus TDP, each lane	Tx-TDP		-4.8			dBm
Average launch power of OFF transmitter, each lane					-30	dBm
Extinction ratio	ER		3.5			dB
Relative Intensity Noise					-128	dB/Hz
Optical return loss tolerance					20	dB
Transmitter reflectance					-12	dB

## RECEIVER CHARACTERISTICS

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Signaling rate, each lane (range)	GBb			10.3125		GBb
Center Wavelength	$\lambda_0$		1264	1271	1278	nm
	$\lambda_1$		1284	1291	1298	nm
	$\lambda_2$		1304	1311	1318	nm
	$\lambda_3$		1324	1331	1338	nm
Damage threshold			3.3			dBm
Receiver reflectance					-26	dB
Maximum Receive Power, each lane	Pmax	2.3				dBm

### Shenzhen Guangzhi Communication Technology Co., LTD.

Production Address: 5th floor, Building 2, Peninsula Industrial Park, No. 3, Gangbian Tian Road, East Lake High-tech Zone, Wuhan Hubei Province, China.

Contact: Mr. Yang Tel.: +86-18607555895 E-mail: yanghan@optst.com

Website: [www.optst.com](http://www.optst.com)

Document Number: OPTST-OP-062 A/0



Sensitivity,each lane					-11.5	dBm
Stressed Receiver Sensitivity(OMA、EOL) ,each lane	S <sub>OMA</sub>	BER@10e-12			-9.6	dBm
LOS Assert	LOS <sub>A</sub>		-28			dBm
LOS De-Assert	LOS <sub>D</sub>				-12	dBm
LOS Hysteresis			0.5		6	dB

**Shenzhen Guangzhi Communication Technology Co., LTD.**

Production Address: 5th floor, Building 2, Peninsula Industrial Park, No. 3, Gangbian Tian Road, East Lake High-tech Zone, Wuhan Hubei Province, China.


Contact:Mr.Yang Tel.: +86-18607555895 E-mail: yanghan@optst.com

**Website: www.optst.com**

Document Number: OPTST-OP-062 A/0



## PIN ASSIGNMENT

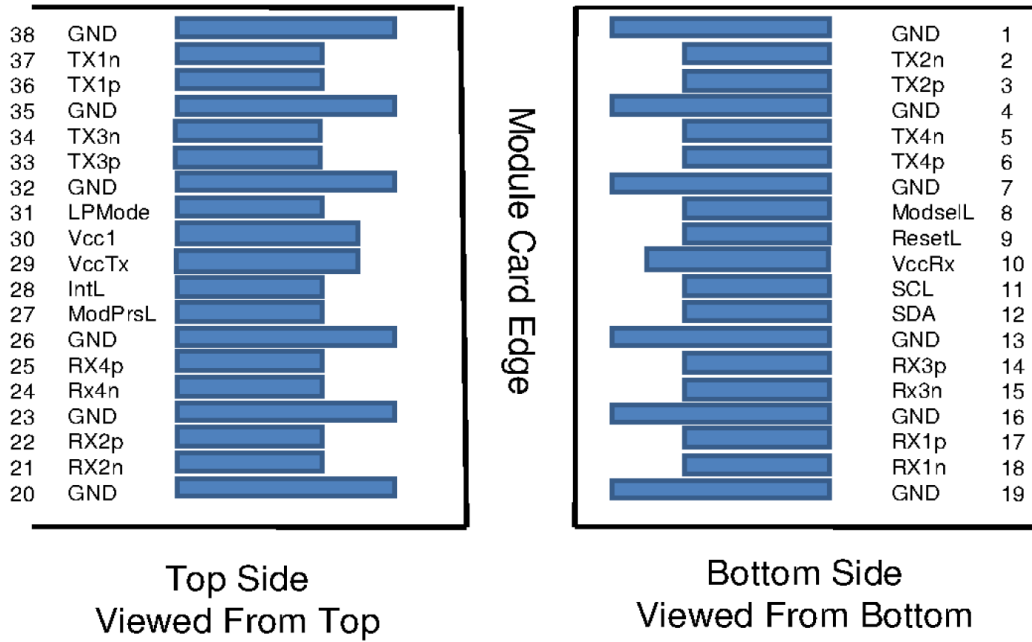

## PIN DESCRIPTION

PIN	Logic	Symbol	Name/Description	Note
1		GND	Ground	
2	CML-I	Tx2n	Transmitter Inverted Data Input	
3	CML-I	Tx2p	Transmitter Non-Inverted Data output	
4		GND	Ground	
5	CML-I	Tx4n	Transmitter Inverted Data Input	
6	CML-I	Tx4p	Transmitter Non-Inverted Data output	
7		GND	Ground	
8	LVTTTL-I	ModSelL	Module Select	
9	LVTTTL-I	ResetL	Module Reset	
10		VccRx	+ 3.3V Power Supply Receiver	
11	LVC MOS-I/O	SCL	2-Wire Serial Interface Clock	
12	LVC MOS-I/O	SDA	2-Wire Serial Interface Data	
13		GND	Ground	
14	CML-O	Rx3p	Receiver Non-Inverted Data Output	
15	CML-O	Rx3n	Receiver Inverted Data Output	

### Shenzhen Guangzhi Communication Technology Co., LTD.

Production Address: 5th floor, Building 2, Peninsula Industrial Park, No. 3, Gangbian Tian Road, East Lake High-tech Zone, Wuhan Hubei Province, China.

Contact: Mr. Yang Tel.: +86-18607555895 E-mail: yanghan@optst.com

Website: [www.optst.com](http://www.optst.com)

Document Number: OPTST-OP-062 A/0



16		GND	Ground	
17	CML-O	Rx1p	Receiver Non-Inverted Data Output	
18	CML-O	Rx1n	Receiver Inverted Data Output	
19		GND	Ground	
20		GND	Ground	
21	CML-O	Rx2n	Receiver Inverted Data Output	
22	CML-O	Rx2p	Receiver Non-Inverted Data Output	
23		GND	Ground	
24	CML-O	Rx4n	Receiver Inverted Data Output	
25	CML-O	Rx4p	Receiver Non-Inverted Data Output	
26		GND	Ground	
27	LVTTTL-O	ModPrsL	Module Present	
28	LVTTTL-O	IntL	Interrupt	
29		VccTx	+3.3 V Power Supply transmitter	
30		Vcc1	+3.3 V Power Supply	
31	LVTTTL-I	LPMODE	Low Power Mode	
32		GND	Ground	
33	CML-I	Tx3p	Transmitter Non-Inverted Data Input	
34	CML-I	Tx3n	Transmitter Inverted Data Output	
35		GND	Ground	
36	CML-I	Tx1p	Transmitter Non-Inverted Data Input	
37	CML-I	Tx1n	Transmitter Inverted Data Output	
38		GND	Ground	

#### Digital Diagnostic Monitor Accuracy

The following characteristics are defined over recommended operating conditions

Parameter	Accuracy	Unit
Internally measured transceiver temperature	+/-3	deg.C
Internally measured transceiver supply voltage	+/-3	%
Measured Tx bias current	+/-10	%
Measured Tx output power	+/-3	dB
Measured Rx received average optical power	+/-3	dB

#### Shenzhen Guangzhi Communication Technology Co., LTD.

Production Address: 5th floor, Building 2, Peninsula Industrial Park, No. 3, Gangbian Tian Road, East Lake High-tech Zone, Wuhan Hubei Province, China.


Contact: Mr. Yang Tel.: +86-18607555895 E-mail: yanghan@optst.com

Website: [www.optst.com](http://www.optst.com)

Document Number: OPTST-OP-062 A/0



## OUTLINE DIMENSIONS (Unit mm)

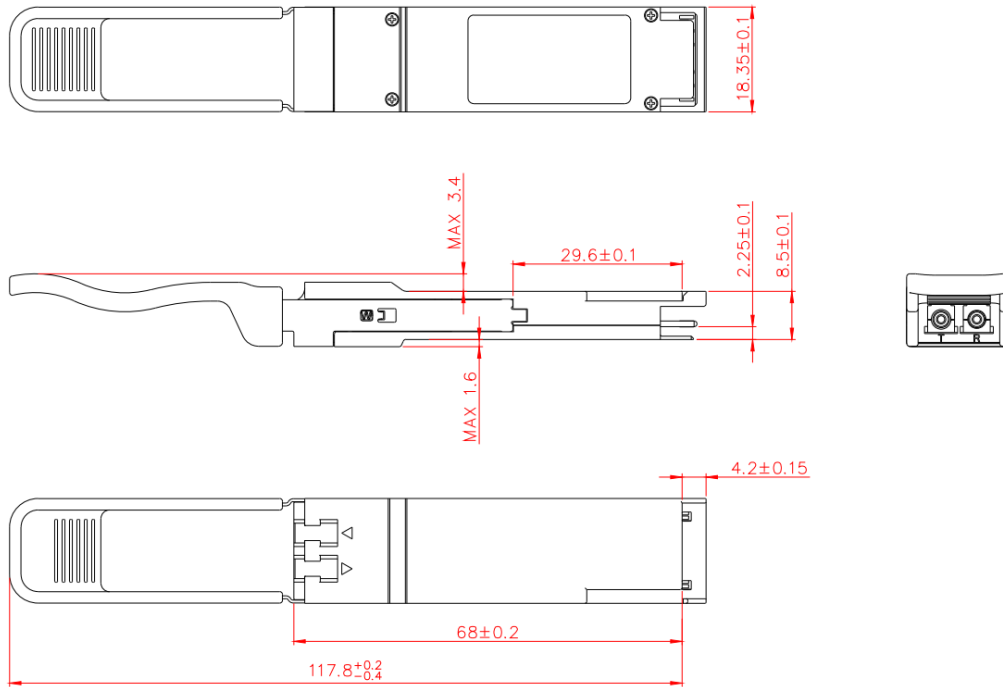

## Ordering information

Part. No	Specifications								
	Rate Gb/s	Tx	Tx WL nm	Po dBm	Rx	Sen. dBm	Temp °C	Reach km	Other
GZ40GQPS311L-10	41.25	CWDM	1264~1338	-7~+2.3	PIN/TIA	<-11.5	0~70	10	RoHS
GZ40GQPS311L-101	41.25	CWDM	1264~1338	-7~+2.3	PIN/TIA	<-11.5	-40~85	10	RoHS

## Warnings

### Handing Precautions:

This device is susceptible to damage as a result of electrostatic discharge (ESD). A static free environment is highly recommended. Please follow guidelines according to proper ESD procedures.

### Laser Safety:

Radiation emitted by laser devices can be dangerous to human eyes. Avoid eye exposure to direct

**Shenzhen Guangzhi Communication Technology Co., LTD.**

Production Address: 5th floor, Building 2, Peninsula Industrial Park, No. 3, Gangbian Tian Road, East Lake High-tech Zone, Wuhan Hubei Province, China.

Contact: Mr. Yang Tel.: +86-18607555895 E-mail: yanghan@optst.com

**Website: www.optst.com**

Document Number: OPTST-OP-062 A/0



or indirect radiation.

**Notice:**

The information provided on this page contains the product target specifications which are subject to change without notice.

**Shenzhen Guangzhi Communication Technology Co., LTD.**

Production Address: 5th floor, Building 2, Peninsula Industrial Park, No. 3, Gangbian Tian Road, East Lake High-tech Zone, Wuhan Hubei Province, China.

Contact: Mr. Yang Tel.: +86-18607555895 E-mail: yanghan@optst.com

**Website: [www.optst.com](http://www.optst.com)**

Document Number: OPTST-OP-062 A/0